



ZAPI SMART CONSOLE

Introduction for D40

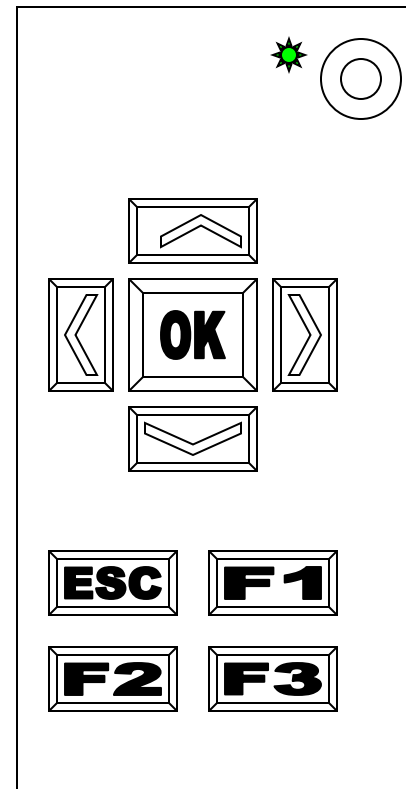

Location of Controller Socket

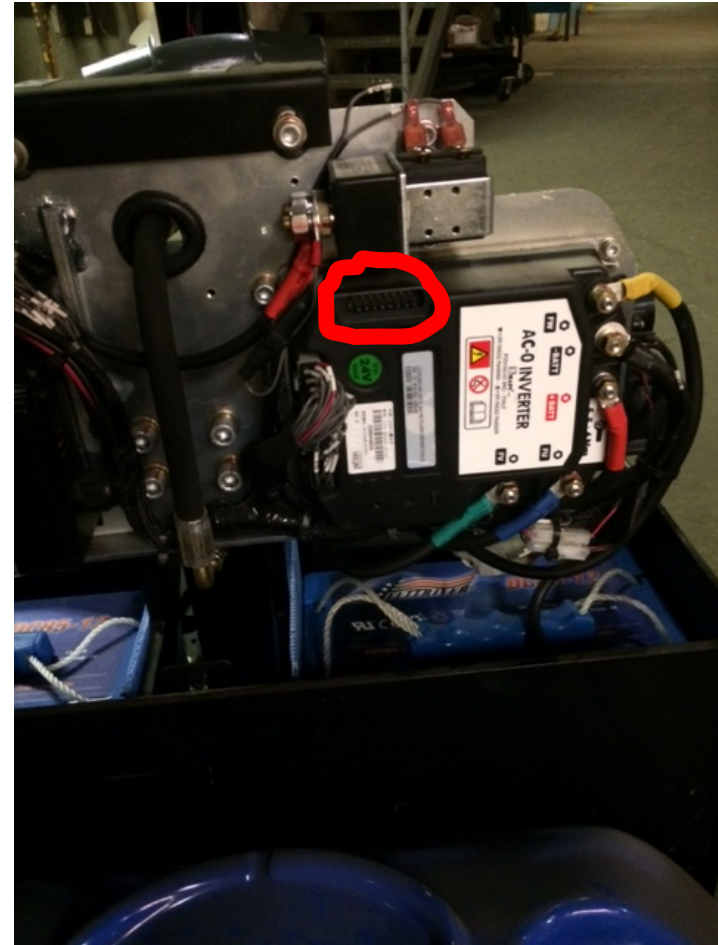

Traction VACC

Key on the truck, connect the flash connecting line. The Display will show:


Press  or  button until RS232 CONSOLE shows on the display

The Display will show :


Press OK to go into the Traction Menu

The Display will show:

Cons AFG ZP021*




Cons AFG ZP021*
RS232 CONSOLE




ACOT2SE4B EP247D
24V 150A 0H


Press OK to go into the Main Menu



The Display will show:

Main Menu


Press  or  button until PROGRAM VACC shows on the display



The Display will show:

MAIN MENU
PROGRAM VACC


Press OK to go into the PROGRAM VACC function



The Display will show the minimum and maximum throttle voltage values. Both directions will be shown

VACC SETTING
CURRENT VALUE

Press OK to clear these values.
Display will show 0.0



The display will show:


FORWARD x.xV x.xV
BACKWARD x.xV x.xV

Slowly depress the accelerator forward to its maximum value. The new minimum and maximum voltages will be displayed on the Console plus an arrow indicating the direction.



Repeat step for reverse direction


When finished , press ESC



The Display will ask : APPLY CHANGES ?

APPLY CHANGES?
YES= OK NO=ESC

Press OK for yes



When finished, the Console shows :

Press and hold power button for 3s
to turn off the Console

Main Menu

